




CERTIFIED **COMBINED**
PROTECTION WHICH
MEETS **POLICE**
APPROVED STANDARDS

Grade II protection with 90 mins fire protection for paper documents.



DUOGUARD GII

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB+S for Grade II
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP's certification rules for fire resisting storage cabinets, SPCR 002
- The three-way boltwork is made from solid steel bolts
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts
- Attractive dark grey appearance (RAL 7016)
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity
- Optional fittings include a data media insert certified, 60 Diskette by NT Fire 017, for one hour's fire protection

DUOGUARD GII

PRODUCT SPECIFICATIONS

| Model | External height (mm) | External width (mm)* | External depth (mm)** | Internal height (mm) | Internal width (mm)*** | Internal depth (mm) | Volume (litres) | Weight (kg) | Standard Fittings |
|-------|----------------------|----------------------|-----------------------|----------------------|------------------------|---------------------|-----------------|-------------|-------------------|
| 65 | 578 | 526 | 547 | 452 | 400 | 360 | 65 | 265 | 1 shelf |
| 110 | 716 | 626 | 587 | 590 | 500 | 386 | 114 | 379 | 2 shelves |
| 150 | 901 | 626 | 587 | 775 | 500 | 386 | 150 | 456 | 2 shelves |
| 200 | 1176 | 626 | 587 | 1050 | 500 | 386 | 203 | 582 | 2 shelves |
| 300 | 1626 | 626 | 587 | 1500 | 500 | 386 | 290 | 748 | 3 shelves |
| 350 | 1626 | 701 | 611 | 1500 | 575 | 410 | 354 | 829 | 3 shelves |
| 450 | 1876 | 701 | 641 | 1750 | 575 | 440 | 443 | 970 | 4 shelves |

Projection of hinge*(20mm) and projection of handle** (65mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 15mm

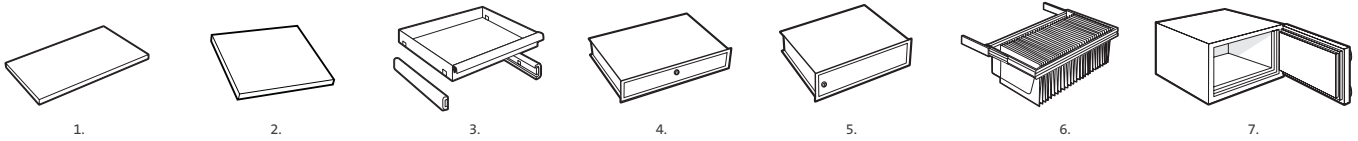


INTERNAL FITTINGS

1. Shelf *
2. Reinforced shelf **
3. Extendable shelf
4. Full width drawer
5. Lockable cupboard
6. Pull out filing frame.
7. Data media insert

* Max shelf capacity 60kg. ** Max shelf capacity 120kg

LOCK OPTIONS



As the primary locking option, DuoGuard GII safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

Dual locking is available from model 110.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.



Approved by the Association of Insurance Surveyors

FIRE TESTING

DuoGuard GII has been approved in accordance with the Swedish standard, NT Fire 017 – 90 Paper, which means that the safe will protect paper documents for 90 minutes. This certification was awarded by SP Technical Research Institute of Sweden.

BURGLARY TESTING



DuoGuard GII has been approved by ECB•S in accordance with the European standard EN 1143-1 for burglary protection in Grade II. A range of attack tools were used to test DuoGuard GII's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.



The DuoGuard GII range is accredited by Secured by Design and meets police approved standards

Authorised dealer

www.chubbsafes.com